



LED Panel OEM & Combi Pack

1. Product Introduction



LED Panel OEM Combi Pack

LED Panel 6060 G2


- PMMA diffuser ensuring long lifetime.
- 2 Performance level for different applications demands (including UGR <19, 90lm/W)
- Included quick disconnect wire for easy installation
- Safety cable available as accessory
- Industrial packing of 4 pcs.

Selection of matched Philips driver as option to be included.

Product introduction : wk1914

(s)ignify

7. Mechanical dimensions Technical Specifications - GM






Types	CertaFlux 5959	CertaFlux30120
Lumen Output	3600lm	3600lm
System Power	40W	40W
System efficacy	90lm/W	90lm/W
сст	CW (6500K)/ NW (4000K)	
CRI	≥80	
Color consistency	s S SDCM	
IP rating	1P20	
Classification	Class II	
Operation Temperature	-10°C to +35°C (Ta25°C)	
Lifetime (hrs)	25,000hrs L70850 @25°C	
Optics	Symmetric	
Input Voltage	220-240V, 50/60 Hz	
Power factor	≥0.9	
Mounting / Installation	Recessed/Suspended, PCV (to be ordered as separate accessory)	
Housing	Metal housing with white painting, PMMA Light Guide, PS diffuser	
Dimensions	597x597mm, 297x1197mm	
Height	Luminaire: 8mm (without mounting accessories) Luminaire + driver: 31,5mm	
Weight	597x597: 2.0Kg 297x1197: 2.3Kg	
Packaging	TR version, 4pcs in one master box, no individual inner packaging MR version, 4pcs in one master box, colored individual inner packaging	
Certificate	CB/EMC/CE	



9. Option : OEM label and combi pack

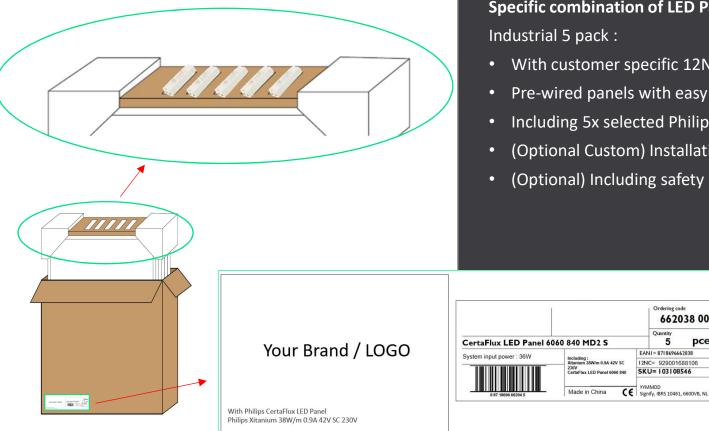

Specific combination of LED Panel + Philips driver

- With customer specific 12NC
- Pre-wired panels with easy disconnect
- Including 5x selected Philips drivers
- (Optional Custom) Installation instruction

Ordering code 662038 00

Quantity

5

EANI = 8718696662038

12NC= 929001688106

SKU= 103108546 YYMMDD

pce

(Optional) Including safety cables

