




Flow Bollard

A family of four distinctive landscape luminaires inspired by modern city style. With its optimized lighting output, stylish design and aluminum housing it is the perfect addition to modern city urban life.

Product size (dimensions in mm)

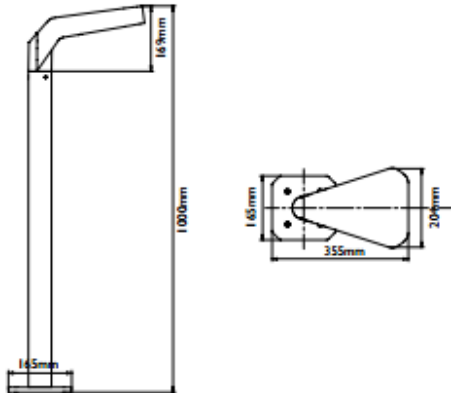

Features and benefits



- Family available
 - holistic and integrated impressions on landscape application
- LED-based
 - perfect control of light distribution & long-lasting performances
 - little energy consumption & environmental friendly
- Precise selected photometric packages
 - various alternatives for beam angles, beam combinations, intensity distributions, CCT, etc. cover complete requirements of all landscape applications
 - flexibility in urban, landscape and residential areas

IP65 IK10 50KHrs



Technical parameters



| | |
|-----------------------|---|
| Type | BCP760 |
| Light source | 5x Low Power LED |
| CCT | WW(3000K), NW(4000K) |
| Lumen output | WW 127lm, NW 142lm |
| CRI | WW>75, NW>70 |
| Optic | Diffused glass |
| Power consumption | 4W |
| Power input | 220-240V / 50-60 Hz |
| Material and Finish | Die-cast Alu housing, Polycarbonate Optical cover |
| Housing color | Dark gray(RAL7043), Light gray(RAL9006) |
| Lumen Maintenance | 50Khrs (L70, Ta=25°C) |
| Weight | 4.8Kg |
| Mounting | On ground surface mount |
| Classifications | Class I, IP65, IK10 |
| Operating Temperature | -40°C – + 50°C |

Key Portfolio*

Product ID

BCP760 LED1/WW PSU 220-240V GR

BCP760 LED1/WW PSU 220-240V SI

BCP760 LED1/NW PSU 220-240V GR

BCP760 LED1/NW PSU 220-240V SI

* For full product portfolio please contact your local Philips Representative