



MASTER LEDtube EM/Mains T8

MAS LEDtube 600mm 9W 840 T8 RN

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance which cannot be distinguished from traditional fluorescent. For those that are looking for value for money within limited budget and re-lamping efforts for better light effect and lifetime.

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Main Application	Industrial
Nominal Lifetime (Nom)	50000 h
Switching Cycle	200000X
B50L70	50000 h
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	160 °
Luminous Flux (Nom)	1050 lm
Luminous Flux (Rated) (Nom)	1050 lm
Rated Beam Angle	160 °
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	117 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	83
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	9 W
Lamp Current (Max)	43 mA
Lamp Current (Min)	36 mA
Starting Time (Nom)	0.5 s
Warm Up Time To 60% Light (Nom)	0.1 s
Power Factor (Nom)	0.9
Voltage (Nom)	220-240 V
Temperature	
T-Ambient (Max)	35 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	55 °C

MASTER LEDtube EM/Mains T8


Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Product Length	600 mm
Approval and Application	
Energy Saving Product	Yes
Suitable For Accent Lighting	No
Energy Efficiency Label (EEL)	A+
Approval Marks	CE marking KEMA Keur certificate RoHS compliance
Energy Consumption kWh/1000 h	9 kWh

Product Data	
Full product code	871869657281800
Order product name	MAS LEDtube 600mm 9W 840 T8 RN
EAN/UPC - Product	8718696572818
Order code	929001239502
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001239502
Net Weight (Piece)	0.150 kg

Warnings and Safety

- NOTES: The overall energy efficiency and light distribution of any installation that uses these lamps are determined by the design of the installation.


Dimensional drawing

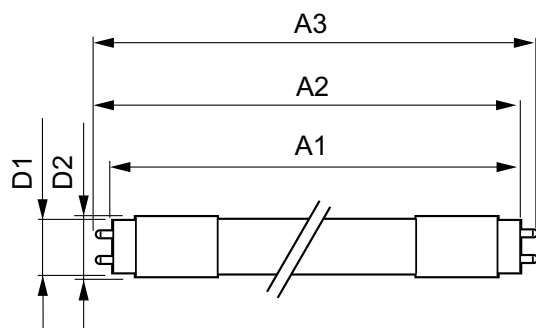


TLED 2ft 220-240V 9W-18W 4000K G13 ND

Product	D1	D2	A1	A2	A3
MAS LEDtube 600mm 9W 840 T8 RN	25.78 mm	28 mm	1198.2 mm	1205.3 mm	1212.4 mm

Photometric data



CalcuLert Photometrics 4.3 Philips Lighting B.V. Page 13

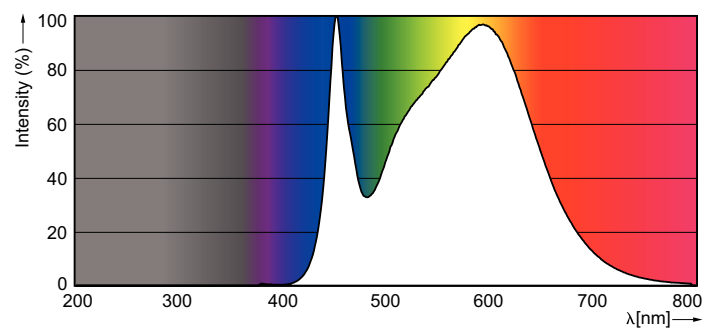

LEDtube 1200 mm UO 20 W /840 T8 ROT

MASTER LEDtube EM/Mains T8

