


Flow – Wall mount

A family of 4 distinctive landscape luminaires inspired by Modern City Style. Designed to let positive energy(windy), to flow free. Simplified luminaires designed by combining line and surface idea, and with optimized lighting output and aluminum housing used, make it wonderful to merge into modern city urban life.

Product size (dimensions in mm)

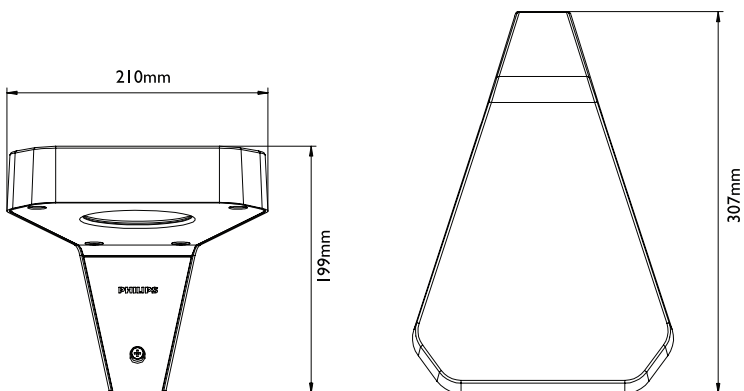

Features and benefits



- Family available
 - holistic and integrated impressions on landscape application
- LED-based
 - perfect control of light distribution & long-lasting performances
 - little energy consumption & environmentally friendly
- Precisely selected photometric packages
 - various alternatives for beam angles, beam combinations, intensity distributions, CCT, etc cover complete requirements of all landscape applications
 - flexibility in urban, landscape and residential areas

Outdoor



IP65

IK10

50Khrs



Technical parameters

Type	BWS760
Light source	5x Low Power LED
CCT	WW(3000K), NW(4000K)
Lumen output	WW 127lm, NW 142lm
CRI	WW>75, NW>70
Optic	Diffused
Power consumption	4W
Power input	220-240V / 50-60 Hz
Material and Finish	Die-cast Alu housing, Polycarbonate Optical cover
Housing color	Dark gray(RAL7043), Light gray(RAL9006)
Lumen Maintenance	50Khrs (L70, Ta=25°C)
Weight	1.8Kg
Mounting	Wall mount
Classifications	Class I, IP65, IK10
Operating Temperature	-40°C ~ + 50°C

Key Portfolio*

Product Description

BWS760 LED1/WW PSU 220-240V SI

BWS760 LED1/WW PSU 220-240V GR

BWS760 LED1/NW PSU 220-240V SI

BWS760 LED1/NW PSU 220-240V GR

* For full product portfolio please contact your local Philips Representative

IEC
60598